

VDF Series (Deep Flat Curve)

特征


- 适用于曲面板材
- 加强提升力
- 高耐磨PU材料
- 卓越的油性表面抓取性能

适用范围

- 平钢板
- 汽车钢板
- 冲压设备
- 钢板供给



规格表示方式.

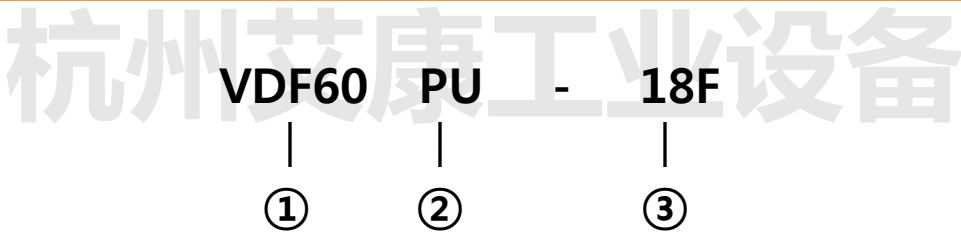

① 大小

② 材质



③ 接头

● VDF25	- ø25
VDF30	- ø30
● VDF40	- ø40
VDF50	- ø50
VDF60	- ø60
VDF80	- ø80
VDF100	- ø100


● PU	- Poly Urethane
	聚氨酯

● 18F	- G1/8" 螺母 (ALL)
14F	- G1/4" 螺母 (ALL)
38F	- G3/8" 螺母 (VDF50,60,80,100)
12F	- G1/2" 螺母 (VDF60,80,100)
N18F	- NPSF1/8" 螺母 (ALL)
N14F	- NPSF1/4" 螺母 (ALL)
N38F	- NPSF3/8" 螺母 (VDF50,60,80,100)
N12F	- NPSF1/2" 螺母 (VDF60,80,100)
14M	- G1/4" 螺栓 (ALL)
38M	- G3/8" 螺栓 (VDF50,60,80,100)
M10M	- M10XP1.5 螺栓 (ALL)


各真空度最大传送力.

型号 (Model)	内部用量 Volume (cm³)	垂直传送力 (Kg) 			水平传送力 (Kg) 		
		-20 kPa	-60 kPa	-90 kPa	-20 kPa	-60 kPa	-90 kPa
VDF25	1.5	1.4	3.0	4.1	0.7	1.9	2.9
VDF30	2.7	1.8	4.4	5.7	1	2.8	3.8
VDF40	7	2.7	6.2	8.3	2.4	4.7	7.1
VDF50	14	4.1	10.1	14	3.5	9.2	18.5
VDF60	24	5.6	13.7	19	4.3	13.8	24.5
VDF80	50.5	8.6	21.2	29.3	7.2	18.5	27
VDF100	94	12.6	30.8	41.7	12.3	28.2	39.6

尺寸

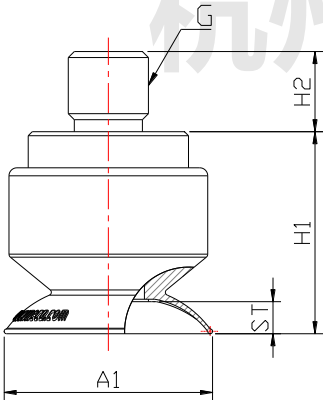

Model	A1	ST	H1	H2	G
VDF25...M10M	26	4	25.2	10	M10XP1.5
VDF25...14M			27.7	9	G1/4"

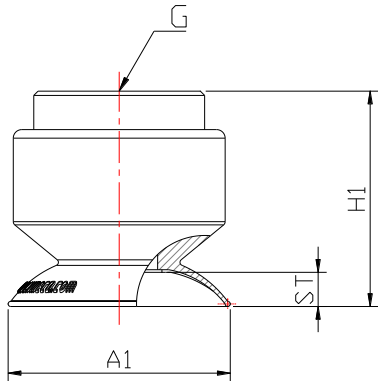


Model	A1	ST	H1	G
VDF25...18F	26	4	25.2	G1/8"
VDF25...14F			36.2	G1/4"
VDF25...N18F			25.2	NPSF1/8"
VDF25...N14F			36.2	NPSF1/4"


SUCTION CUPS




尺寸

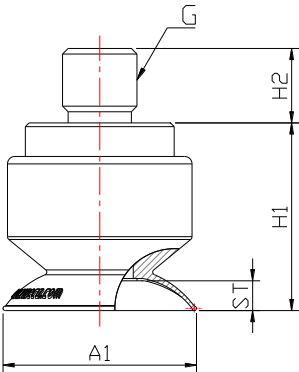


Model	A1	ST	H1	H2	G
VDF30...M10M	32.2	4.3	24.3	10	M10XP1.5
VDF30...14M			26.8	9	G1/4"
VDF30...38M			26.8	9	G3/8"



Model	A1	ST	H1	G
VDF30...18F	32.2	4.3	24.3	G1/8"
VDF30...14F			35.3	G1/4"
VDF30...N18F			24.3	NPSF1/8"
VDF30...N14F			35.3	NPSF1/4"

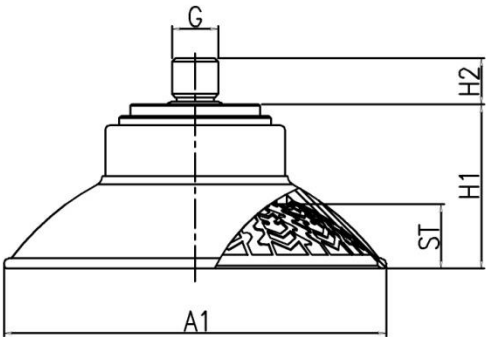


Model	A1	ST	H1	H2	G
VDF40...M10M	42.5	6.9	26.1	10	M10XP1.5
VDF40...14M			28.6	9	G1/4"
VDF40...38M			28.6	9	G3/8"

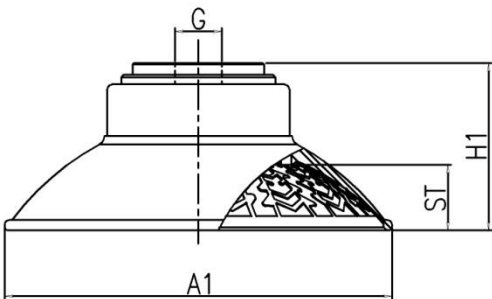

Model	A1	ST	H1	G
VDF40...18F	42.5	6.9	26.1	G1/8"
VDF40...14F			37.1	G1/4"
VDF40...N18F			26.1	NPSF1/8"
VDF40...N14F			37.1	NPSF1/4"


为了产品功能的改善，产品的规格会有变更。

尺寸

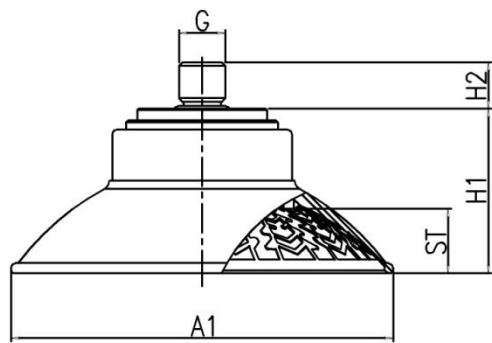


Model	A1	ST	H1	H2	G
VDF50...M10M	53	8.4	28.5	10	G1/8"
VDF50...14M			40	9	G3/8"
VDF50...38M			40	9	M10XP1.5
VDF60...M10M	63.5	10.9	31.5	10	G1/8"
VDF60...14M			43	9	G3/8"
VDF60...38M			43	9	M10XP1.5

杭州艾康工业设备

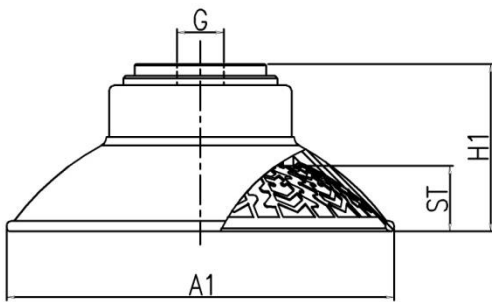


Model	A1	ST	H1	G
VDF50...18F	53	8.4	28.5	G1/8"
VDF50...14F			28.5	G1/4"
VDF50...38F			30.5	G3/8"
VDF50...N18F			28.5	NPSF 1/8"
VDF50...N14F			28.5	NPSF 1/4"
VDF50...N38F			30.5	NPSF 3/8"
VDF60...18F	63.5	10.9	31.5	G1/8"
VDF60...14F			31.5	G1/4"
VDF60...38F			33.5	G3/8"
VDF60...12F			31.5	G1/2"
VDF60...N18F			31.5	NPSF 1/8"
VDF60...N14F			31.5	NPSF 1/4"
VDF60...N38F			33.5	NPSF 3/8"
VDF60...N12F			31.5	NPSF 1/2"

尺寸

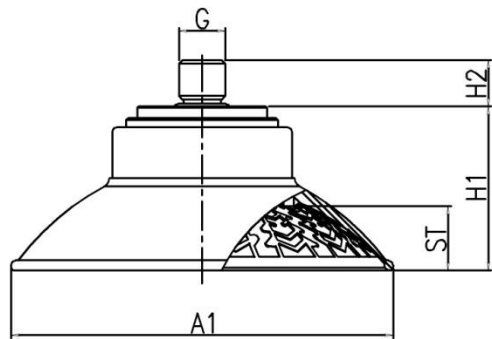

Model	A1	ST	H1	H2	G
VDF80...M10M	83.5	13.9	35.1	10	M10XP1.5
VDF80...14M			46.6	9	G1/4"
VDF80...38M			46.6	9	G3/8"
VDF100...M10M	104.2	17.3	37.8	10	M10XP1.5
VDF100...14M			49.3	9	G1/4"
VDF100...38M			49.3	9	G3/8"

杭州艾康工业设备

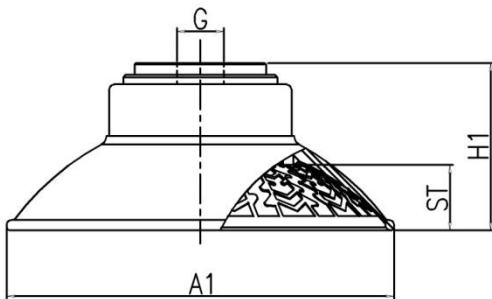

Model	A1	ST	H1	G
VDF80...18F	83.5	13.9	35.1	G1/8"
VDF80...14F			35.1	G1/4"
VDF80...38F			37.1	G3/8"
VDF80...12F			35.1	G1/2"
VDF80...N18F			35.1	NPSF 1/8"
VDF80...N14F			35.1	NPSF 1/4"
VDF80...N38F			37.1	NPSF 3/8"
VDF80...N12F			35.1	G1/8"
VDF100...18F	104.2	17.3	37.8	G1/8"
VDF100...14F			37.8	G1/4"
VDF100...38F			39.8	G3/8"
VDF100...12F			37.8	G1/2"
VDF100...N18F			37.8	NPSF 1/8"
VDF100...N14F			37.8	NPSF 1/4"
VDF100...N38F			39.8	NPSF 3/8"
VDF100...N12F			37.8	NPSF 1/2"